

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0466250400

Status:

Active

Overview:

Micro-Fit Connector System

Description:

Micro-Fit BMI Plug Housing, Single Row, Panel Mount, 4 Circuits, Nylon,UL 94V-0

Documents:

3D Model

Application Specification 466250001-AS-000 (PDF)

3D Model (PDF)


Packaging Specification 466250000-PK-000 (PDF)

Drawing (PDF)

Datasheet (PDF)

Product Specification PS-44300-001-001 (PDF)

RoHS Certificate of Compliance (PDF)

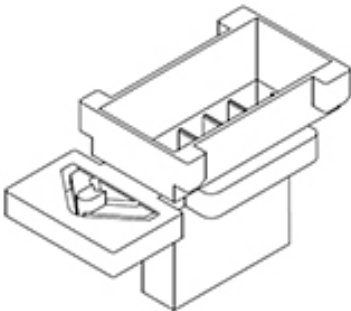

Series image - Reference only

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Crimp Housings
Series	46625
Application	Power, Wire-to-Board, Wire-to-Wire
Overview	Micro-Fit Connector System
Product Name	Micro-Fit BMI
UPC	887191386607

Physical

Circuits (maximum)	4
Color - Resin	Black
Flammability	94V-0
Gender	Plug
Glow-Wire Capable	No
Lock to Mating Part	No
Material - Resin	Nylon
Net Weight	1.761/g
Number of Rows	1
Packaging Type	Bag
Panel Mount	Yes
Pitch - Mating Interface	3.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	466250001-AS-000
Packaging Specification	466250000-PK-000
Product Specification	PS-44300-001-001
Sales Drawing	SD-46625-001-001

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

46625 Series

Mates With

Micro-Fit BMI Receptacle Housing 46623

Use With

Micro-Fit 3.0 Crimp Terminals 43031
Micro-Fit 3.0 Pre-Crimped Lead 214762 ,
214763

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[46625-0400](#)