

TC Series

Chip Tantalum Capacitors (Large Capacitance)



FEATURES

- Ta-MnO₂ technology
- Low DCL
- Parameters stability over voltage and time
- Undertab and J-lead LF



LEAD-FREE
LEAD-FREE COMPATIBLE
COMPONENT




RoHS
COMPLIANT

APPLICATIONS

- DC/DC
- Industrial
- Telecom
- IoT
- Home applications
- Sensors

MARKING

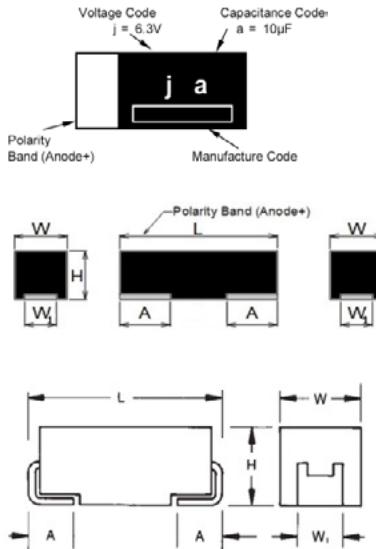

CASE DIMENSIONS:

millimeters (inches)

Code	EIA Code	EIA Metric	L \pm 0.10 (0.004)	W \pm 0.10 (0.004)	H \pm 0.10 (0.004)	W ₁ \pm 0.10 (0.004)	A \pm 0.10 (0.004)
M	0603	1608-09	1.60 (0.063)	0.85 (0.033)	0.80 (0.031)	0.55 (0.022)	0.50 (0.020)

CASE DIMENSIONS:

millimeters (inches)

Code	EIA Code	EIA Metric	L \pm 0.20 (0.008)	W \pm 0.20 (0.008)	H \pm 0.20 (0.008)	W ₁ \pm 0.20 (0.008)	A \pm 0.30 (0.012)
A	1206	3216-18	3.20 (0.126)	1.60 (0.063)	1.60 (0.063)	1.20 (0.047)	0.80 (0.031)
P	0805	2012-12	2.00 (0.079)	1.25 (0.049)	1.20 (0.047) max.	0.90 (0.035)	0.45 (0.018)

HOW TO ORDER

TC	M	0J
Type	Case Size See table above	Rated DC Voltage 0G = 4Vdc 0J = 6.3Vdc 1A = 10Vdc 1C = 16Vdc 1D = 25Vdc 1E = 25Vdc 1V = 35Vdc

475

Capacitance Code
pF code: 1st two digits
represent significant figures,
3rd digit represents multiplier
(number of zeros to follow)

M
T
Tolerance
M = \pm 20%

8R
T
Packaging
8 = Tape width
R = Positive electrode
on the side opposite to
sprocket hole

-
□□□
Discrimination code

TC Series

Chip Tantalum Capacitors (Large Capacitance)



TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C
Capacitance Range:	1µF to 100µF
Capacitance Tolerance:	±20%
Leakage Current DCL:	Please see the ratings and part number reference table below
Temperature Range:	-55°C to +125°C

Note: Conductive Polymer Capacitors are designed to operate within the limits of the environmental conditions specified for each series. If operated continuously at their maximum temperature and / or humidity limit, or beyond these limits, capacitors may exhibit a parametric shift in capacitance and increases in ESR. These changes may occur earlier if the specified environmental conditions are exceeded. Similarly, their normal operational time period will be significantly extended if their general duty cycle includes operation below maximum temperature within humidity controlled environments. Careful attention should be paid to maximum temperature with associated high humidity environments as well as voltage derating, ripple current and current surges.

Please reference the KYOCERA AVX Conductive Polymer Capacitor Guidelines for more information or contact factory for application assistance

CAPACITANCE AND RATED VOLTAGE RANGE

(LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage DC (V _R) @ 85°C						Cap Code
µF	Code	4V (g)	6.3V (j)	10V (A)	16V (C)	20V(D)	25V(E)	
1.0	105			P	A,M,P	A	A,M,P	A
1.5	155				A			E
2.2	225		P	A,M,P	A,M			J
3.3	335			A,P	A		A	N
4.7	475		A,M,P	A,M,P	A	A	A	S
6.8	685		P	A	A			W
10	106	P	A,M,P	A,M,P	A			a
15	156		P	A				e
22	226	M, P	A,M,P	A	A			j
33	336	A	A,M	A				n
47	476		A					s
100	107	A						ā

Released ratings

Note: Voltage ratings are minimum values. KYOCERA AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.

RATINGS & PART NUMBER REFERENCE

Part No.	Case Size	Capacitance (µF)	Rated Voltage (V)	Maximum Operating Temp. (°C)	DCL Max. (µA)	DF Max. (%)	Impedance @100kHz (Ω)	MSL
4 Volt								
TCP0G106M8R	P	10	4	125	0.5	20	9.3	1
TCM0G226M8R	M	22	4	125	0.9	20	9	1
TCP0G226M8R	P	22	4	125	0.9	20	7.7	1
TCA0G336M8R	A	33	4	125	1.3	10	3.5	1
TCA0G107M8R	A	100	4	125	4.0	30	3	1
6.3 Volt								
TCPOJ225M8R	P	2.2	6.3	125	0.5	20	17.5	1
TCA0J475M8R	A	4.7	6.3	125	0.5	8	4.9	1
TCMOJ475M8R	M	4.7	6.3	125	0.5	20	9	1
TCPOJ475M8R	P	4.7	6.3	125	0.5	20	11.8	1
TCPOJ685M8R	P	6.8	6.3	125	0.5	20	9.3	1
TCA0J106M8R	A	10	6.3	125	0.6	8	4	1
TCMOJ106M8R	M	10	6.3	125	0.6	20	9	1
TCPOJ106M8R	P	10	6.3	125	0.6	20	8.3	1
TCPOJ156M8R	P	15	6.3	125	0.9	20	7.7	1
TCA0J226M8R	A	22	6.3	125	1.4	14	3.5	1
TCMOJ226M8R-V1	M	22	6.3	125	13.0	30	9	1
TCPOJ226M8R	P	22	6.3	125	1.4	25	5	1
TCA0J336M8R	A	33	6.3	125	2.1	12	3.2	1
TCMOJ336M8R-V1	M	33	6.3	125	208.0	30	9	1
TCA0J476M8R	A	47	6.3	125	3.0	18	3.2	1
10 Volt								
TCP1A105M8R	P	1.0	10	125	0.5	10	17.5	1
TCA1A225M8R	A	2.2	10	125	0.5	6	5.6	1
TCM1A225M8R	M	2.2	10	125	0.5	20	13.5	1



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TC Series

Chip Tantalum Capacitors (Large Capacitance)

RATINGS & PART NUMBER REFERENCE

Part No.	Case Size	Capacitance (μF)	Rated Voltage (V)	Maximum Operating Temp. (°C)	DCL Max. (μA)	DF Max. (%)	Impedance @100kHz (Ω)	MSL
TCP1A225M8R	P	2.2	10	125	0.5	20	14.4	1
TCA1A335M8R	A	3.3	10	125	0.5	8	4.9	1
TCP1A335M8R	P	3.3	10	125	0.5	20	11.8	1
TCA1A475M8R	A	4.7	10	125	0.5	8	4.2	1
TCM1A475M8R	M	4.7	10	125	0.5	20	9	1
TCP1A475M8R	P	4.7	10	125	0.5	20	9.3	1
TCA1A685M8R	A	6.8	10	125	0.7	8	4	1
TCA1A106M8R	A	10	10	125	1.0	8	3	1
TCM1A106M8R	M	10	10	125	10.0	20	9	1
TCP1A106M8R	P	10	10	125	1.0	20	7.7	1
TCA1A156M8R	A	15	10	125	1.5	10	3.5	1
TCA1A226M8R	A	22	10	125	2.2	12	3.2	1
TCA1A336M8R	A	33	10	125	3.3	8	1.7	1
16 Volt								
TCA1C105M8R	A	1.0	16	125	0.5	6	7	1
TCM1C105M8R	M	1.0	16	125	0.5	10	15	1
TCP1C105M8R	P	1.0	16	125	0.5	10	16.1	1
TCA1C155M8R	A	1.5	16	125	0.5	6	5.6	1
TCA1C225M8R	A	2.2	16	125	0.5	6	4.9	1
TCM1C225M8R	M	2.2	16	125	0.5	20	13.5	1
TCA1C335M8R	A	3.3	16	125	0.5	6	4.8	1
TCA1C475M8R	A	4.7	16	125	0.8	6	3.9	1
TCA1C685M8R	A	6.8	16	125	1.1	6	3.8	1
TCA1C106M8R	A	10	16	125	1.6	8	3.5	1
TCA1C226M8R	A	22	16	125	3.5	30	2.3	1
20 Volt								
TCA1D105M8R	A	1.0	20	125	0.5	6	7	1
TCA1D475M8R	A	4.7	20	125	0.9	6	3.9	1
25 Volt								
TCA1E105M8R	A	1.0	25	125	0.5	6	7	1
TCM1E105M8R	M	1.0	25	125	0.5	10	10	1
TCP1E105M8R	P	1.0	25	125	0.6	20	9.3	1
TCA1E335M8R	A	3.3	25	125	0.8	6	4.8	1

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25C.

Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 1.5 volts.

DCL is measured at rated voltage after 5 minutes.

Impedance allowed to move up to 1.25 times catalog limit post mounting.

NOTE: KYOCERA AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

TC Series

Chip Tantalum Capacitors (Large Capacitance)

QUALIFICATION TABLE


TEST	TC series (Temperature range -55°C to +125°C)		
	Condition	Characteristics	
Endurance	Apply rated voltage (Ur) at 85°C for 1000hrs (for M and P case) 2000hrs (for A case) through a serial resistance of $\leq 3.0\Omega$. Stabilize at room temperature for 24 hours before measuring.	Visual examination	no visible damage
		DCL	2x initial limit
		$\Delta C/C$	within $\pm 30\%$ of initial value (M case), $\pm 20\%$ (A,P case)
		DF	2x initial limit
Humidity	Store at $60 \pm 2^\circ\text{C}$, 90-95% relative humidity for 500+ 12/0 hours. Stabilize at room temperature and humidity for 24 hours before measuring.	Visual examination	no visible damage
		DCL	2x initial limit
		$\Delta C/C$	within $\pm 30\%$ of initial value (M case), $\pm 20\%$ (A,P case)
		DF	2x initial limit
Temperature Stability	Step	Temperature°C	Duration(min)
		1	-55
		2	+85
		3	+125
			15
		DCL	n/a
		$\Delta C/C$	0/-30%
		DF	IL*
			IL*
			IL*
Surge Voltage	Apply 1.3x rated voltage (Ur) at $85 \pm 2^\circ\text{C}$ for 1000 cycles, 300sec charge and 30sec discharge resistance 1000Ω.	Visual examination	no visible damage
		DCL	2x initial limit
		$\Delta C/C$	$\pm 20\%$ of initial limit
		DF	2x initial limit
Vibration	4.17 JIS C 5101-1 Frequency: 10 to 55 to 10Hz/min. Amplitude: 1.5mm Time: 2hours each in X and Y directions	Visual examination	no visible damage
		DCL	initial limit
		$\Delta C/C$	within $\pm 5\%$ of initial value
		DF	initial limit

*Initial Limit

For use outside of recommended conditions and special request, please contact KYOCERA AVX.

Initial measurement max. 1hr after the removal from dry pack or after pretreatment at 85°C for 24 hours.


PACKAGING SPECIFICATIONS

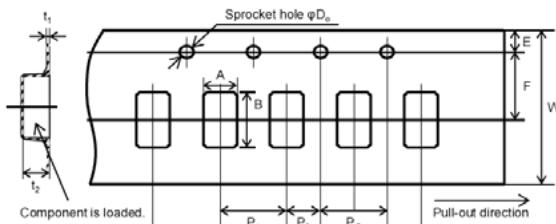

Unit (mm)

Case	A ± 0.10	B ± 0.10	W ± 0.20	E ± 0.10	F ± 0.05	P1 ± 0.10	P2 ± 0.05	P0 ± 0.10	D0 $\pm 0.10/0$	t1 ± 0.05	t2 ± 0.10	Standard packaging quantity
A	1.90	3.50	8.00	1.75	3.50	4.00	2.00	4.00	$\varphi 1.50$	0.25	1.90	2,000 pcs
M	1.00	1.85	8.00	1.75	3.50	4.00	2.00	4.00	$\varphi 1.50$	0.20	1.00	4,000 pcs
P	1.55	2.30	8.00	1.75	3.50	4.00	2.00	4.00	$\varphi 1.55 \pm 0.05$	0.25	1.32	3,000 pcs

REEL DIMENSIONS

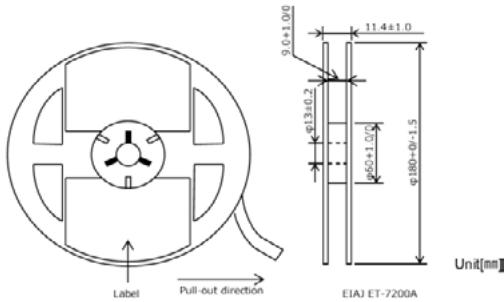

 The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KYOCERA AVX:

[TCP1A475M8R](#) [TCP1A106M8R](#) [TCA1A226M8R](#) [TCA1C475M8R](#) [TCA1A106M8R](#) [TCA0J476M8R](#) [TCM1C105M8R](#)
[TCM1A475M8R](#) [TCM0J106M8R](#) [TCM1A106M8R](#) [TCP1C105M8R](#) [TCP1A225M8R](#) [TCP1E105M8R](#)
[TCA1D105M8R](#) [TCA1A156M8R](#) [TCM0G226M8R](#) [TCM1C225M8R](#) [TCP0J106M8R](#) [TCA0G107M8R](#) [TCA1A475M8R](#)
[TCA1C105M8R](#) [TCA0J106M8R](#) [TCM0J475M8R](#) [TCA1E105M8R](#) [TCM0G106M8R](#) [TCA0G475M8R](#)
[TCA0G156M8R](#) [TCA0G226M8R](#) [TCA0G336M8R](#) [TCA0J156M8R](#) [TCA1C335M8R](#) [TCA1C685M8R](#) [TCA0G686M8R](#)
[TCA0J335M8R](#) [TCA0J475M8R](#) [TCA1A155M8R](#) [TCA1A335M8R](#) [TCA1A685M8R](#) [TCA1C155M8R](#) [TCP0G156M8R](#)
[TCP0G225M8R](#) [TCP0G335M8R](#) [TCP0J155M8R](#) [TCP0J335M8R](#) [TCP0J685M8R](#) [TCP1A155M8R](#) [TCP1A335M8R](#)
[TCP0G106M8R](#) [TCP0G226M8R](#) [TCP0J156M8R](#) [TCP0J225M8R](#) [TCP0J226M8R](#) [TCP0J475M8R](#) [TCP1A105M8R](#)
[TCA0G476M8R](#) [TCA0J226M8R](#) [TCA0J336M8R](#) [TCA1A225M8R](#) [TCA1C106M8R](#) [TCA1C225M8R](#) [TCA1E475M8R](#)
[TCM0J336M8R-V1](#) [TCM1A225M8R](#) [TCM1E105M8R](#) [TCM0J226M8R-V1](#)