


●Features

- 1) Guaranteed 0.3W in 0603(inch) size
- 2) Further improved surge resistance characteristics compared to ESR series.
- 3) ROHM resistors have obtained ISO9001 / IATF16949 certification
- 4) Corresponds to AEC-Q200

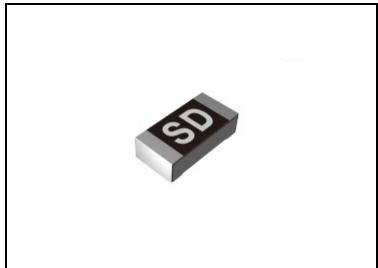

●Products list

Part No.	Size		Rated power (70°C) (W)	Limiting element voltage (V)	Temperature coefficient (ppm/ °C)	Resistance tolerance (%)	Resistance range (Ω)	Operating temperature range (°C)	Automotive grade available
	(mm)	(inch)							
SDR03	1608	0603	0.30	150	±100	D (±0.5%)	10≤R≤1M (E24/96 series)	-55 ~ +155	Yes
					±200	F (±1%)	1≤R<10 (E24/96 series)		
					±100	F (±1%)	10≤R≤10M (E24/96 series)		
					±200	J (±5%)	1≤R≤10M (E24 series)		
SDR10	2012	0805	0.50	400	±100	D (±0.5%)	10≤R≤1M (E24/96 series)	-55 ~ +155	Yes
					±100	F (±1%)	1≤R≤10M (E24/96 series)		
					±200	J (±5%)	1≤R≤10M (E24 series)		

* Design and specifications are subject to change without notice.

Carefully check the specification sheet supplied with the product before using or ordering it.

* E24 : Standard products, E96 : Custom products.

●Part Number Description

SDR	0 3	E Z P	J	1 0 0
Part No.	Size (mm [inch])	Packaging specifications code	Resistance tolerance	Nominal resistance
SDR (High anti-surge chip resistors)	03 (1608 [0603])	Part No. Code Packaging specifications Quantity / Reel	D (±0.5%) F (±1%) J (±5%)	Resistance code, 3 or 4 digits. Resistance tolerance Resistance code D,F : 4 digits J : 3 digits
	10 (2012 [0805])	SDR03 EZP Paper tape (4mm pitch) 5,000		
		SDR10 EZP Paper tape (4mm pitch) 5,000		
EX.)				
1Ω = 1R0 (±5%)				
9.1Ω = 9R1 (±5%)				
10Ω = 10R0 (±1%)				
100 (±5%)				
1MΩ = 1004 (±1%)				
105 (±5%)				


● Chip resistor dimensions and markings

■ SDR03/10



Part No.	(mm)	(inch)	L	W	t	a	b	Marking existence
SDR03	1608	0603	1.60±0.10	0.80±0.10	0.45±0.10	0.25±0.10	0.25±0.10	SD
SDR10	2012	0805	2.00±0.10	1.25±0.10	0.55±0.10	0.25±0.10	0.40±0.20	SD

● Land pattern example

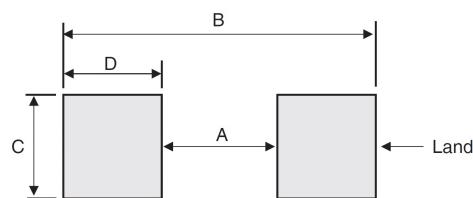


(Unit:mm)

Dimensions Part No.	A	B	C	D
SDR03	1.0	2.0	0.8	0.5
SDR10	1.2	2.6	1.15	0.7


●Derating curve

When the ambient temperature exceeds 70°C, power dissipation must be adjusted according to the derating curve below.


■SDR03(0.3W)

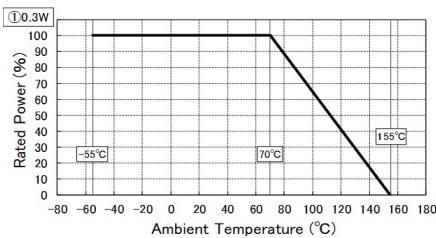

■SDR03(0.25W)

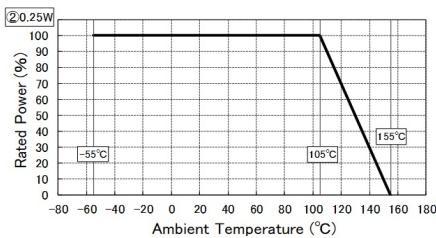

■SDR10

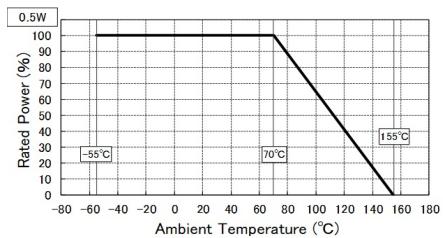

●Characteristics

Test items	Guaranteed value	Test conditions
Resistance	See P.1	20°C
Variation of resistance with temperature	See P.1	Measurement: +25/+125°C
Overload	±(2.0% + 0.1Ω)	Test voltage is the smaller one of ① or ② ① Rated voltage(current)×2.5, 2 s ② Maximum overload voltage ≈
Solderability	A new uniform coating of minimum of 95% of the surface being immersed and no soldering damage.	Rosin-ethanol solution 25% (mass) Soldering condition: 245±5°C Duration of immersion: 2.0±0.5s
Resistance to soldering heat	±(1.0% + 0.05Ω) No remarkable abnormality on the appearance.	Soldering condition: 260±5°C Duration of immersion: 10±1s
Rapid change of temperature	±(1.0% + 0.05Ω)	Test temp: -55°C ~ +125°C 5cycles
Damp heat, steady state	±(3.0% + 0.1Ω)	40°C, 93% (Relative Humidity) Test time: 1,000h
Endurance at 70°C	±(3.0% + 0.1Ω)	Rated voltage(current), 70°C 1.5h:ON – 0.5h:OFF Test time: 1,000h
Endurance	±(3.0% + 0.1Ω)	155°C Test time: 1,000h
Resistance to solvent	±(1.0% + 0.05Ω)	23±5°C, Immersion cleaning, 5±0.5min Solvent: 2-propanol
Bend strength of the end face plating	±(1.0% + 0.05Ω) Without mechanical damage such as breaks.	-
Static electric characteristics	±(5.0% + 0.05Ω)	Voltage: 3kV C: 100pF R: 1.5kΩ Apply cycle: Once


※Maximum overload voltage (Test voltage)

Compliance Standard(s) : IEC60115-8
JIS C 5201-1

SDR03	SDR10
200V	600V

● Tape dimensions

■ Paper tape

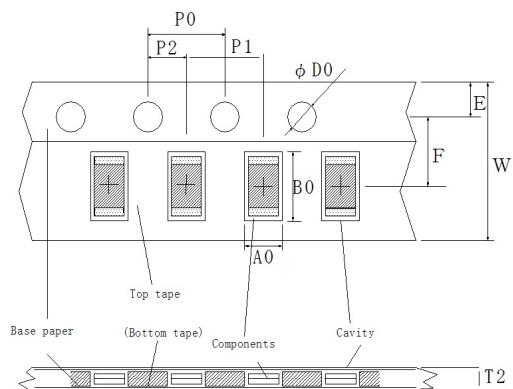


Part No.	W	F	E	A0	B0
SDR03	8.0 ± 0.3	3.5 ± 0.05	1.75 ± 0.1	1.1 ± 0.1	1.9 ± 0.1
SDR10	8.0 ± 0.3	3.5 ± 0.05	1.75 ± 0.1	$1.65^{+0.2}_{-0.1}$	$2.4^{+0.2}_{-0.1}$

Part No.	D0	P0	P1	P2	T2
SDR03	$\phi 1.5^{+0.1}_0$	4.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	MAX1.1
SDR10	$\phi 1.5^{+0.1}_0$	4.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	MAX1.1

● Reel dimensions

Using two kinds of reels for taping.

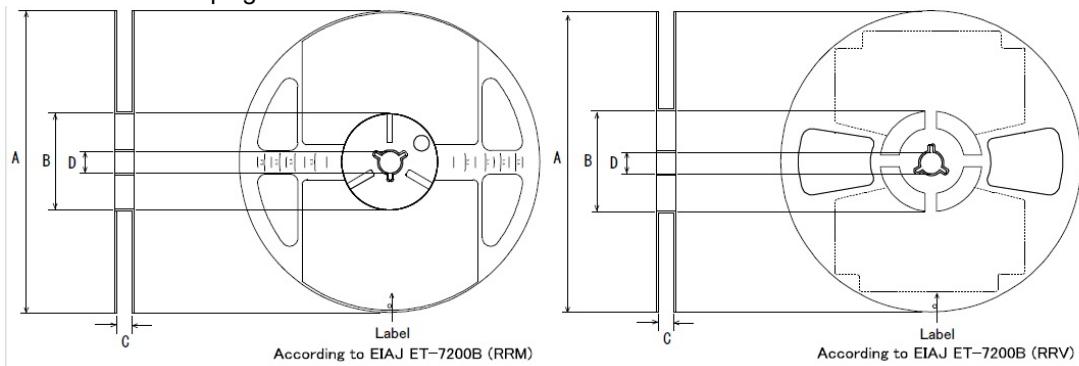

Part No.	A	B	C	D
SDR03	$\phi 180^{+0.1}_{-1.5}$	$\phi 60^{+1.0}_0$	$9^{+1.0}_0$	$\phi 13 \pm 0.2$
SDR10				

Notice

Precaution on using ROHM Products

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

JAPAN	USA	EU	CHINA
CLASS III	CLASS III	CLASS II b	
CLASS IV		CLASS III	CLASS III

2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
 - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Sealing or coating our Products with resin or other coating materials
 - [g] Use of our Products without cleaning residue of flux (Exclude cases where no-clean type fluxes is used. However, recommend sufficiently about the residue.); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - [h] Use of the Products in places subject to dew condensation
4. The Products are not subject to radiation-proof design.
5. Please verify and confirm characteristics of the final or mounted products in using the Products.
6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse, is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.
8. Confirm that operation temperature is within the specified range described in the product specification.
9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

Precautions Regarding Application Examples and External Circuits

1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of Ionizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.
3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
3. In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

General Precaution

1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.
2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.
3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ROHM Semiconductor:

SDR03EZPD1000	SDR03EZPD1003	SDR03EZPD1131	SDR03EZPD1152	SDR03EZPD1200	SDR03EZPD1202
SDR03EZPD1211	SDR03EZPD1241	SDR03EZPD1300	SDR03EZPD1301	SDR03EZPD1302	SDR03EZPD1502
SDR03EZPD1503	SDR03EZPD1601	SDR03EZPD1602	SDR03EZPD1691	SDR03EZPD1783	SDR03EZPD1803
SDR03EZPD18R0	SDR03EZPD2000	SDR03EZPD2001	SDR03EZPD2002	SDR03EZPD2003	SDR03EZPD2101
SDR03EZPD2153	SDR03EZPD2202	SDR03EZPD2212	SDR03EZPD22R0	SDR03EZPD2402	SDR03EZPD2433
SDR03EZPD2612	SDR03EZPD2741	SDR03EZPD2873	SDR03EZPD3000	SDR03EZPD3002	SDR03EZPD3003
SDR03EZPD30R0	SDR03EZPD3300	SDR03EZPD3571	SDR03EZPD3601	SDR03EZPD3653	SDR03EZPD3901
SDR03EZPD3903	SDR03EZPD3923	SDR03EZPD4020	SDR03EZPD4121	SDR03EZPD4223	SDR03EZPD4303
SDR03EZPD43R2	SDR03EZPD4420	SDR03EZPD4530	SDR03EZPD4641	SDR03EZPD4701	SDR03EZPD4702
SDR03EZPD4751	SDR03EZPD4752	SDR03EZPD49R9	SDR03EZPD5110	SDR03EZPD5111	SDR03EZPD5112
SDR03EZPD5603	SDR03EZPD6192	SDR03EZPD68R0	SDR03EZPD6982	SDR03EZPD7502	SDR03EZPD8062
SDR03EZPD8661	SDR03EZPD9092	SDR03EZPD9531	SDR03EZPD9761	SDR03EZPF1005	SDR03EZPF1100
SDR03EZPF11R0	SDR03EZPF1200	SDR03EZPF1202	SDR03EZPF12R0	SDR03EZPF1303	SDR03EZPF13R0
SDR03EZPF1470	SDR03EZPF14R3	SDR03EZPF1500	SDR03EZPF1502	SDR03EZPF18R0	SDR03EZPF1R30
SDR03EZPF1R60	SDR03EZPF1R80	SDR03EZPF2001	SDR03EZPF20R0	SDR03EZPF2201	SDR03EZPF24R0
SDR03EZPF2700	SDR03EZPF2702	SDR03EZPF27R0	SDR03EZPF2R20	SDR03EZPF2R40	SDR03EZPF2R70
SDR03EZPF3000	SDR03EZPF3002	SDR03EZPF3302	SDR03EZPF3320		