
COMPLIANT





Low Profile SMD Type Crystal Units



FEATURES

- Low cost
- · Industry standard
- Wide frequency range
- · Excellent aging
- Surface-mount
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912




Note

• Not compatible with vapor phase reflow mounting

This part is a miniature AT cut strip crystal unit packaged for surface mounting.

STANDARD ELECTRICAL SPECIFICATIONS								
PARAMETER	SYMBOL	CONDITION	UNIT	MIN.	TYP.	MAX.		
Frequency range	Fo		MHz	3.579545	-	66.000		
Frequency tolerance	ΔF/F _O	At 25 °C	ppm	-30	-	+30		
Temperature stability	T _C	Ref. to 25 °C	ppm	-50	-	+50		
Operating temperature range	T _{OPR}		°C	-10	-	+70		
Storage temperature range	T _{STG}		°C	-55	-	+125		
Shunt capacitance	C ₀		pF	-	-	7		
Load capacitance	CL	Customer specified	pF	10	-	Series		
Insulation resistance	I _R	100 V _{DC}	ΜΩ	500	-	-		
Drive level	D_L		μW	=	100	500		
Aging	Fa	At 25 °C, per year	ppm	-5	-	+5		

EQUIVALENT SERIES RESISTANCE (ESR) AND MODE OF VIBRATION (MODE)									
FREQUENCY RANGE (MHz)	MAX. ESR (Ω)	MODE	FREQUENCY RANGE (MHz)	MAX. ESR (Ω)	MODE				
3.579 to 3.999	200	Fundamental/AT	10.000 to 13.999	80	Fundamental/AT				
4.000 to 4.999	150	Fundamental/AT	14.000 to 39.999	50	Fundamental/AT				
5.000 to 5.999	120	Fundamental/AT	40.000 to 66.999	80	3 rd overtone				
6.000 to 9.999	100	Fundamental/AT							

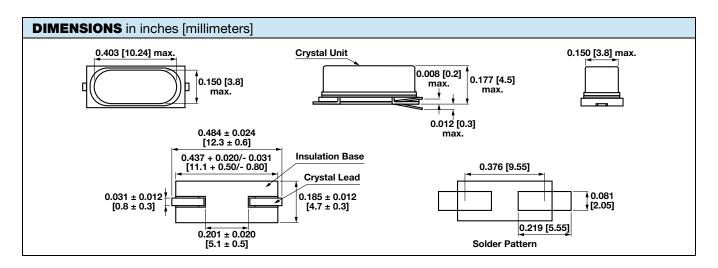





Vishay Dale



XT49M R -20 20M e2

MODEL OTR LOAD FREQUENCY/MHz JEDEC® LEAD (Pb)-FREE

blank = standard blank = series STANDARD

R = -40 °C to +85 °C -20 = 20 pF

-30 = 30 pF -32 = 32 pF

GLOBAL PART NUMBER

X T 9 M 2 0 A N A 2 0 M

MODEL LOAD PACKAGE OPTION FREQUENCY

GLOBAL PART NUMBERING

X T 9 S 2 0 A N A 4 0 M

MODEL NUMBER

XT9S = XT49S XT9M = XT49M XTU1 = XTUM1

LOAD CAPACITANCE

18 = 18 pF 20 = 20 pF NL = series to be specified by customer

PACKAGE CODE

Tape and reel G = RF5 (XT9S) H = RF7 (XT9M)

> Bulk A = B04 (all models)

OPTIONS

NA = no additional options RR = extended temperature of - 40 °C to + 85 °C Contact factory for all other options

FREQUENCY

4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12.288 MHz M is used as decimal place holder in frequency

Example: XT49S-20 40M

X T 3 6

MODEL NUMBER

XT46 = XT46C XT36 = XT36C

2 0

LOAD CAPACITANCE

18 = 18 pF 20 = 20 pF NL = series to be specified by customer

PACKAGE CODE

Tape and reel H = RF7

Bulk A = B04 (all models)

FREQUENCY

2

М

4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12.288 MHz M is used as decimal place holder in frequency

Example: XT36C-20 12M



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

 XT9M20ANA3M6864
 XT9M20ANA18M432
 XT9M20ANA24M
 XT9MNLANA24M
 XT9M20ANA8M

 XT9M30ANA24M576
 XT9MNLANA11M0592
 XT9M20ANA3M6864
 XT49MR-208MHZ
 XT9MNLANA12M

 XT9M20ANA20M
 XT9M20ANA14M7456
 XT9M20ANA16M
 XT9MNLANA10M
 XT9M20ANA14M31818

 XT9M20ANA6M
 XT9ML20ANA12M
 XT9M20ANA12M
 XT9MNLANA8M
 XT9MNLANA10M
 XT9M20HRR8M

 XT49M24MHZ
 XT49M-205MHZ
 XT49M-32 11.0592MHZ