



10GHz Surface Mount Highpass Filter

H100XHXS



DLI • Novacap • Syfer • Voltronics

www.dilabs.com

www.knowlesc capacitors.com

DESCRIPTION

DLI's 10GHz highpass filter offers unmatched size and performance in a surface mount configuration. This filter utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature.

FEATURES


- Small Size
- Frequency Stable over Temperature
- Solder Surface Mount Package
- Excellent Repeatability
- Operating Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

SPECIFICATIONS*

Parameter	Frequency Range	Min	Typ.	Max
3dB Cutoff (GHz)	-		10	
Insertion Loss (dB)	10.5 - 23GHz		0.75	2
Return Loss (dB)		15	20	
Low Side Rejection (dB)	DC - 5.5GHz	30		
Input Power (W)				TBD

*Electrical specifications based on typical mounted performance at room temperature. Insertion loss shall vary ±0.5dB over temperature.

Typical Measured Performance

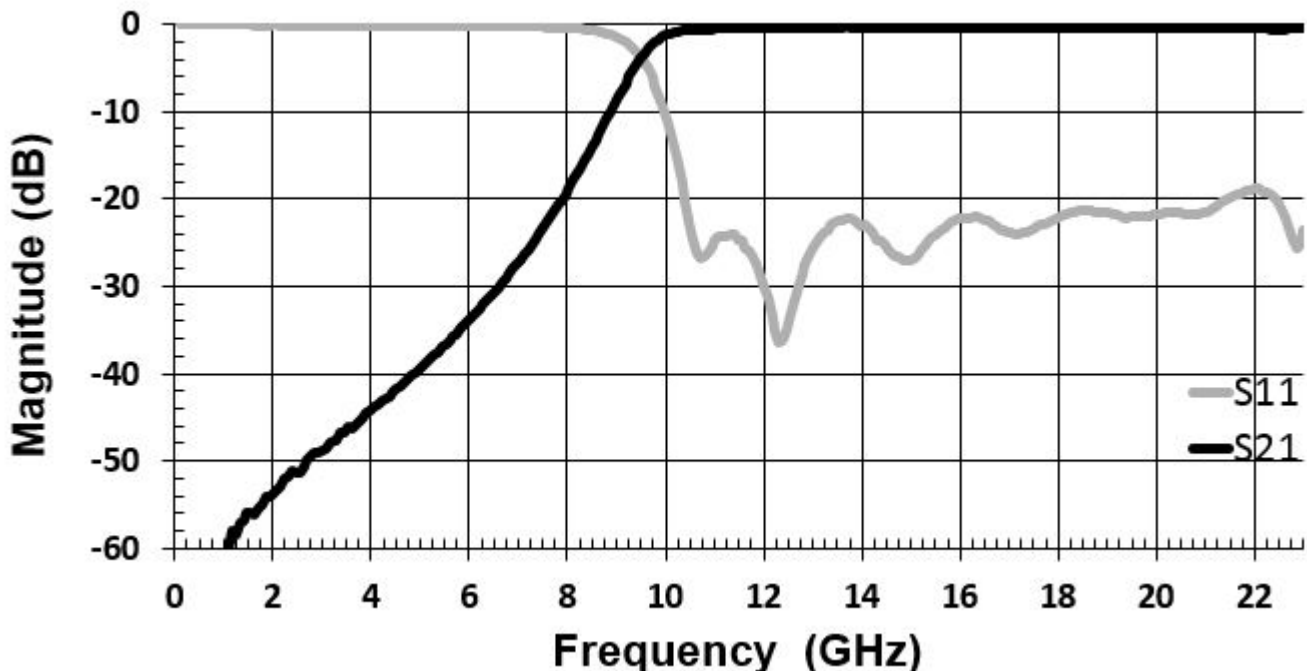



10GHz Surface Mount Highpass Filter



H100XHXS




DLI • Novacap • Syfer • Voltronics

www.dilabs.com


www.knowlesc capacitors.com

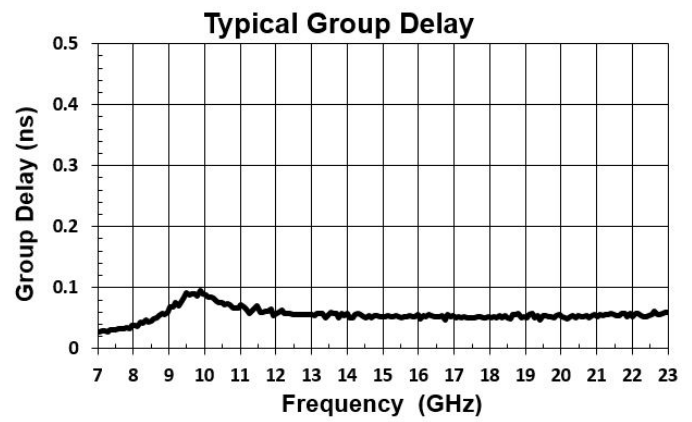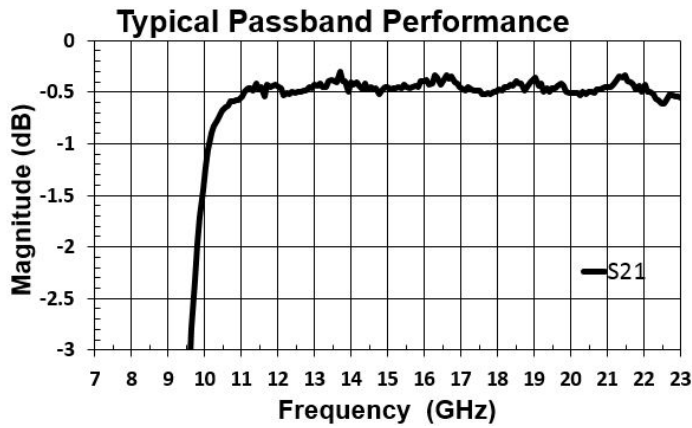

Physical Dimensions

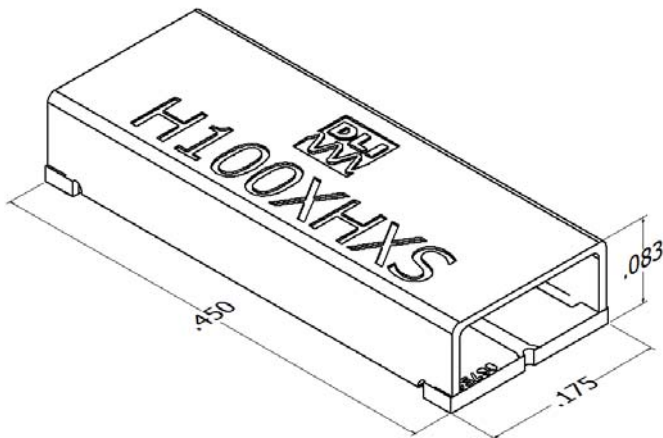


Isometric View

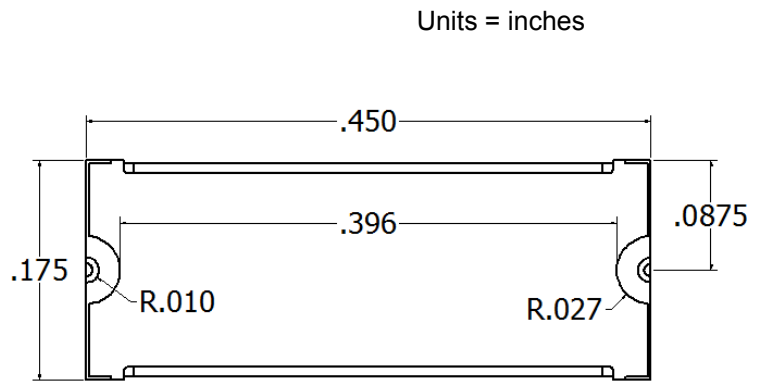

Bottom View

Units = inches

Recommended PCB Layout

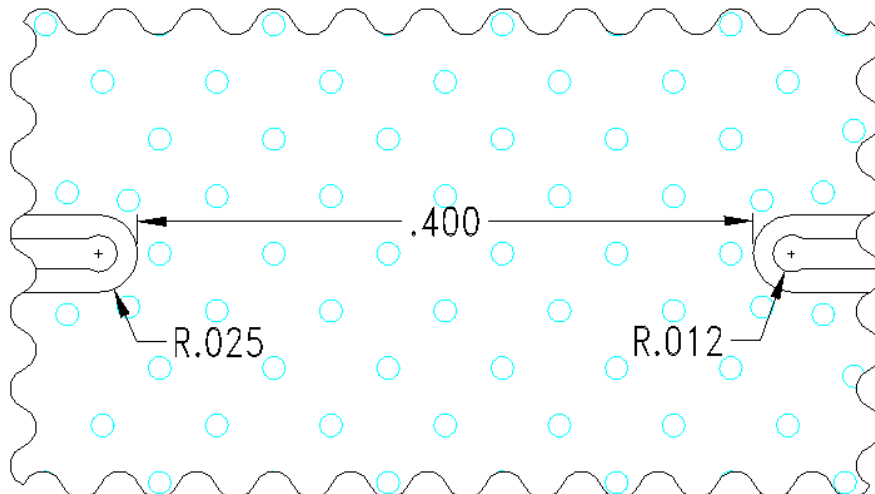

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Knowles:](#)

[H100XHXS](#)